



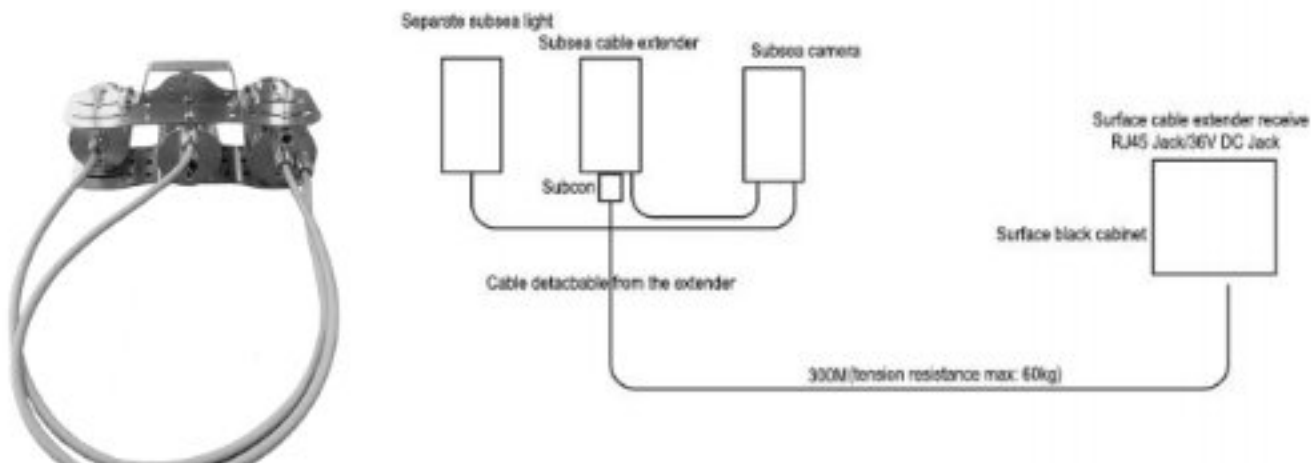

Happy customer Aquarium / Bergen / Norway

2.8MM Lens 5MP 25FPS Underwater IP Camera #DZ10010-SS(UW-S5-3CX)

Application: Aquaculture (fish farming, raising sea cucumber, etc.), Aquarium breeding, Laboratory observation, Shipborne, Ship engine monitoring, Car, Underwater wedding photography, Undersea marine life research, hole of water conservancy pipe, Downhole TV, Diving adventure camera, Underwater engineering acceptance, Downhole observation (such as drilling and workover), Fishing

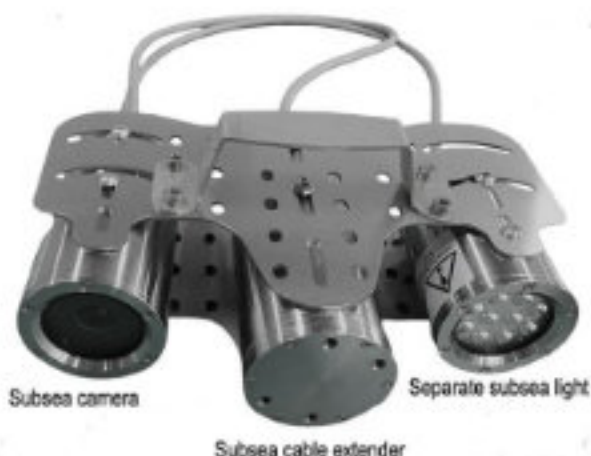

Noted:

1. Cable detachable from the cable extender device. Please plug-in the cable to the extender in the air not in water. When we delivery the goods, there is a cap at the end of the cable to protect the pins of the connector, please do not move of the cap until you finish the the buried cable. Hope the saltwater do not enter into connector and the metal pins avoid from the corrosion
2. When operation, there is a steel wire to protect the cable and bear the pulling force when you buried the cable. The professional people will do that.



MARIN FOTO

Knappevegen 24, 5337 RONG - NORWAY

Tlf: 92 02 32 48

www.marinfoto.no
marin@uvfoto.com



Detail Spec

Camera Dimension	Φ70mm*285.5mm(L)	
Lens	2.8mm (H.FOV:100°), lens	
Sensor	1/2.7" OV CMOS sensor ,color 0.01Lux F1.2,black/white 0.001Lux F1.2	
Resolution	5MP 2592×1520P 25FPS	
Separate subsea light	4pcs led lights and 6 pcs infrared lights, 10 level brightness level ;2000Lumen	
Water depth	500Kpa (50M). Customized water depth is available.	
Camera Housing	316L stainless steel	
Cable	The default length is 10 meters (the longest is no more than 80 meters),PU material,Diameter 10MM.Resistance to 60KG pull,Anti-aging,Anti-friction,Resistance to seawater corrosion,Special underwater wire.	
Cable length	120M-300M is available	
Watertight cable end	Cable end with RJ45 jack and DC power supply	
Cable extender	Separate cable extender	
Support device	Support iOS, Android, computer, NVR.Compatible with hikvision, dahua, proprietary protocol.(Only support windows-IE browser for camera internal parameter setting)	
Supporting agreement	IPv4/IPv6,802.1x,HTTPS, HTTP, TCP/IP, UDP, RTP, RTCP, UPNP, RTSP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP,RTSP,ONVIF;SDK Secondary development	
Use environment	Sea water / fresh water /Underwater,land,Car,Shipborne.	
Working humidity	0%-100%	
working temperature	-20°~55°	
Power Supply	DC36V	
Net weight	9KG	
Package	1* camera 1* camera bracket 1*U disk (instruction and software)	1* subsea light 1*surface black cabinet

Fornøyd kunde
Nye opplevelser?
Besøk Akvariet.
 Åpent alle dager kl. 10-18



Akvariet
 I Bergen



MARIN FOTO

Knappevegen 24, 5337 RONG - NORWAY

Tlf: 92 02 32 48

www.marinfoto.no
 marin@uvfoto.com

